

**CASE IH**  
AGRICULTURE  
FOR THOSE WHO DEMAND MORE

# FARMALL 50A

50 HP TRACTOR





# YOUR FARMING PARTNER

Ready to handle any implement

There are some farming operations for which the key qualities you want in a tractor are the simplest ones. You need a machine that's straightforward in design. That has the strength to handle heavy tasks day after day. And that never lets you down. That tractor is the Case IH Farmall 50A.

A turbocharged four-cylinder engine lies at the heart of the Farmall 50A, with a rated output of 50hp. That gives you more than enough power for PTO implements, haulage and any operations that use the tractor's hydraulics.

With its compact build, a width of 1.68m and a wheelbase of under 2.00m, the Farmall 50A is one of the easiest tractors of its size to handle, whether at the headland or around the yard. You'll spent less time turning, and more time getting on with your work. You can specify either 2wd or 4wd versions.

Mechanical Lift-o-Matic linkage control with top link draft sensing provides 1,500kg of lift capacity. Steering and rear linkage/hydraulic outlets are served by separate systems, providing respective oil flow rates of 20 l/min and 44 l/min. A single hydraulic outlet is standard, and a second is optional.

**FARMALL 50A. SIMPLE, STRONG, RELIABLE.**

## ADVANTAGES

- Individually configure the lever to the remote valve
- Compact and highly maneuverable
- Versatile and capable of all farm works





# NO JOB IS TOO TOUGH

The ideal, compact utility tractor

Offering eight forward and eight reverse speeds, the Farmall 50A transmission ensures you'll always find a gear well-matched to the job in hand, from slow-speed field work or yard manoeuvring to fast road travel. A double clutch lets you change gear or disengage drive to the wheels without affecting the operation of the independent 540rpm PTO.


Whether you choose an open station Farmall 50A or a cabbed version, you'll find this is a tractor that makes driving and operation a pleasure. Access is unimpeded from both sides, controls are logically laid-out and easy to work with, and engine noise is muted, a noise reduction kit can even bring levels down to as little as 80 dBa. Your dealership will be pleased to discuss the aftermarket cab option that can be fitted to tractors upon delivery to its premises, providing complete weather protection, ventilation and further sound-deadening comfort.

With a tight turning circle, excellent weight distribution, impressive all-round visibility and robust front axles in both 2wd and 4wd configurations, Farmall 50A tractors make the perfect partner for a matched Case IH loader. Accessing low buildings and tight gateways when manoeuvring loads is no problem, thanks to a low overall height and responsive steering. You will find plenty of hydraulic power available when it comes to lifting heavy bales and other items.

Case IH farm equipment is sold and supported by a vast network of dealers over Europe. Each one meets the high standards we set to ensure our customers receive the best possible back-up, ranging from advice on machine purchase through to full parts supply and knowledgeable service support. Case IH and your Case IH dealer create a partnership that's always there to back your business.


**FARMALL 50A. WORK IN COMFORT.**

MODELS	FARMALL 50A
<b>ENGINE</b>	<b>Simpsons</b>
Number of cylinders, Type	4, Turbocharged
Capacity (cm <sup>3</sup> )	2,200
Rated engine power (kW/hp(CV))	37 / 50
Rated engine speed (rpm)	2,700
Fuel tank capacity (l)	51
<b>TRANSMISSION</b>	
Standard	8 Fwd / 8 Rev synchronised
Shuttle type Synchronised	Mechanical Shuttle
<b>DRIVE AND STEERING</b>	
Front axle standard	2 wheel drive
Front axle optional	4 wheel drive with limited slip differential
4wd operation	mechanical engagement
<b>POWER TAKE OFF</b>	
Type	mechanical engagement
Rear pto speeds (rpm)	540
<b>HYDRAULIC SYSTEM</b>	
Pump flow - steering (l/min)	20
Pump flow - hitch and external services (l/min)	44
Remote valves	1 standard (2nd valve optional)
Rear linkage control	Mechanical Hitch Control, Top link draft sensing
Rear lift capacity (kg)	1,500
<b>WEIGHTS AND DIMENSIONS</b>	
Minimum weight 2WD / 4WD (kg)	1,780 / 2,010
Overall length (mm)	3,775
Max height, ROPS upright / ROPS folded (mm)	4,475 / 2,200
Min width (mm)	1,838
Wheelbase 2WD / 4WD (mm)	1,962
<b>STANDARD TYRES</b>	
Front 2WD / 4WD	9.5 x 24
Rear	14.9R28

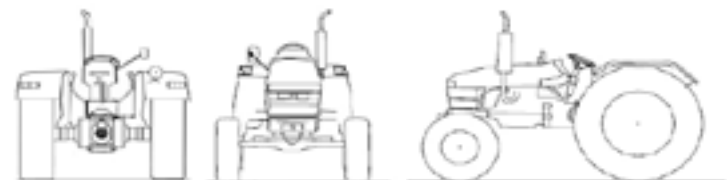

FARMALL A -COM-LF | 12/2016 – Printed in AUSTRIA

**WWW.CASEIH.COM**  
**CNH UK Ltd., Cranes Farm Road, Basildon, Essex SS14 3AD**  
 www.caseih.com - Free phone 00800 22 73 44 00

 Safety never hurts! Always read the Operator's Manual before working with any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs, and use any safety features provided. This literature has been published for worldwide circulation. The standard and optional equipment and the availability of individual models may vary from one country to the next. Case IH reserves the right to undertake modifications without prior notice to the design and technical equipment at all times without this resulting in any obligation whatsoever to make such modifications to units already sold. Whilst every effort is made to ensure that the specifications, descriptions and illustrations in this brochure are correct at the time of going to press, these are also subject to change without prior notice. Illustrations may show optional equipment or may not show all standard equipment. Case IH recommends **AKCELA** lubricants.

**CASE IH**  
**AGRICULTURE**  
 FOR THOSE WHO DEMAND MORE