

AW TRAILERS

The New 'Ultima' Range of Trailers

(available in Monocoque Grain, Potato & Root, Dump and Bale models in 12, 14 and 16 Tonne capacities)

16 Tonne Ultima Monocoque Trailer with optional Perspex front window



14 Tonne Ultima Potato & Root with standard front & side window and optional roll-over sheet




New Improved Chassis Features :-

- Wider Chassis for greater stability
- 445/65R22.5 Kargo Radial Tyres fitted as standard (huge selection of flotation tyres also available)
- Increased Tipping Angle
- Longer Drawbar

New Improved Body Features :-

- Bigger Capacity
- 4mm Thick Sides (fully welded), stronger top & rear member
- 5mm Thick Floor with extra floor supports
- New, improved Contractor Tailboard including combination equaliser / check valve

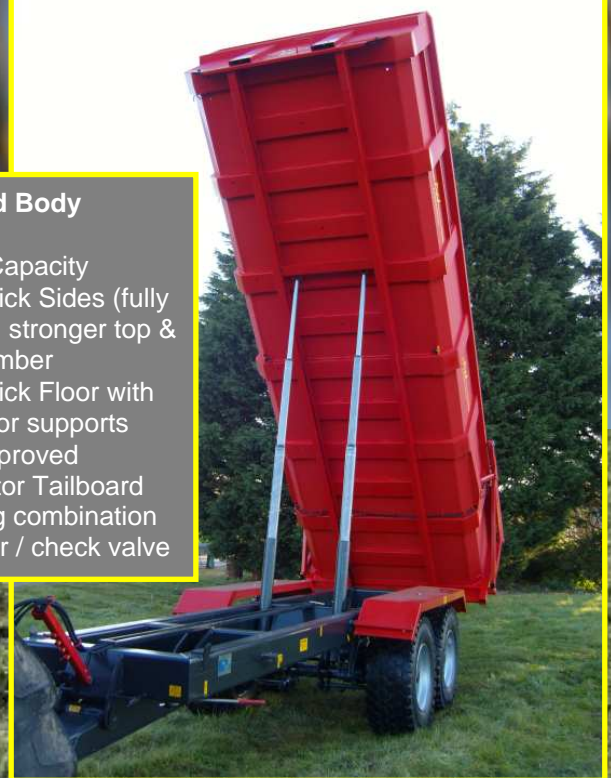

Standard 'Ultima' Trailer Features

(fitted on all 'Ultima' models)

- 3 leaf Parabolic Sprung Suspension
- 10 stud High Speed Axles, 420x180 brake (2m track on Monocoque models, 1.8m track on Potato & Root models)
- Full Steel Mudguards
- Commercial LED Road Lighting using maintenance free LED lamps including side and front marker lights
- Sprung Drawbar with adjustable height positions & 60mm Phosphor Bronze Bushes and Chrome Pivots
- Premium Paint Finish including shotblasting, 2 coats of primer, 2 coats of top coat in radiant heated spray booth

High Speed Option

Air brakes with load sensing and ABS. When fitted the 'Ultima' trailers can legally be used on the road at speeds of up to 40mph (when towed by an appropriate vehicle)



Ultima Monocoque Trailers

	12 Tonne Ultima Monocoque		14 Tonne Ultima Monocoque		16 Tonne Ultima Monocoque	
Body length (internal)	5505mm	18'	6100mm	20'	6700mm	22'
Body width (internal)	2275mm	7' 6"	2275mm	7' 6"	2275mm	7' 6"
Body height (internal)	1270mm	4' 2"	1270mm	4' 2"	1270mm	4' 2"
Floor thickness	5mm		5mm		5mm	
Side thickness	4mm		4mm		4mm	
Cubic capacity	15.9m ³	565ft ³	17.6m ³	625ft ³	19.4m ³	688m ³
Chassis	250 x 150 RHS		250 x 150 RHS		250 x 150 RHS	
Axle size	127mm diameter 10 stud		127mm diameter 10 stud		127mm diameter 10 stud	
Brake size	420 x 180mm		420 x 180mm		420 x 180mm	
Wheel track	2000mm	6' 7"	2000mm	6' 7"	2000mm	6' 7"
Tyre size	445/65R22.5 Kargo radial		445/65R22.5 Kargo radial		445/65R22.5 Kargo radial	
O/all length	7125mm	23' 3"	7730mm	25' 3"	8330mm	27' 4"
O/all width	2455mm	8' 1"	2455mm	8' 1"	2455mm	8' 1"
O/all height	2650mm	8' 8"	2650mm	8' 8"	2650mm	8' 8"
Max tipped height	6390mm	21'	6850mm	22' 6"	7410mm	24' 4"
Unladen weight	Approx 5.0 Tonne		Approx 5.3 Tonne		Approx 5.7	

Ultima Potato & Root Trailers

	12 Tonne Ultima Potato & Root		14 Tonne Ultima Potato & Root		16 Tonne Ultima Potato & Root	
Body length (internal)	6100mm	20'	6700mm	22'	6700mm	22'
Body width (internal)	2275mm	7' 6"	2275mm	7' 6"	2275mm	7' 6"
Body height (internal)	1070mm	3' 6"	1070mm	3' 6"	1270mm	4' 2"
Floor thickness	5mm		5mm		5mm	
Side thickness	4mm		4mm		4mm	
Cubic capacity	15m ³	525ft ³	16.3m ³	578ft ³	19.4m ³	688m ³
Chassis	250 x 150 RHS		250 x 150 RHS		250 x 150 RHS	
Axle size	127mm diameter 10 stud		127mm diameter 10 stud		127mm diameter 10 stud	
Brake size	420 x 180mm		420 x 180mm		420 x 180mm	
Wheel track	1800mm	5' 11"	1800mm	5' 11"	1800mm	5' 11"
Tyre size	445/65R22.5 Kargo radial		445/65R22.5 Kargo radial		445/65R22.5 Kargo radial	
O/all length	7730mm	25' 3"	8330mm	27' 4"	8330mm	27' 4"
O/all width	2455mm	8' 1"	2455mm	8' 1"	2455mm	8' 1"
O/all height	2450mm	8'	2450mm	8'	2650mm	8' 8"
Max tipped height	6550mm	21' 6"	7010mm	23'	7410mm	24' 4"
Unladen weight	Approx 5.2 Tonne		Approx 5.5 Tonne		Approx 5.7 Tonne	

Ultima Bale Trailer & Ultima Industrial Dump Trailer

	16 Tonne Ultima Bale		16 Tonne Ultima Industrial Dump	
Bed / body length (internal)	7600mm	25'	4720mm	15' 6"
Bed / body width (internal)	2440mm	8'	2275mm	7' 6"
Body height (internal)	-		915mm	3'
Floor thickness	4mm		6mm	
Side thickness	-		6mm	
Cubic capacity	-		9.2m ³	320ft ³
Chassis	250 x 150 RHS		250 x 150 RHS	
Axle size	127mm diameter 10 stud		127mm diameter 10 stud	
Brake size	420 x 180mm		420 x 180mm	
Wheel track	2000mm	6' 7"	2000mm	6' 7"
Tyre size	445/65R22.5 Kargo radial		445/65R22.5 Kargo radial	
O/all length	9150mm	30'	6150mm	20' 2"
O/all width	2440mm	8'	2455mm	8' 1"
O/all height	1230mm	4'	2295mm	7' 6"
Max tipped height	-		5950mm	19' 6"